



Model shown KRD-41R

### Product Details

#### Specifications

Kairak's versatile Drop-in Pan Chillers can easily be retrofitted into existing counters or can be designed into new counters (refrigerated/non-refrigerated). These practical components can be used not only for chef prep counters, but also for buffet stations and serving lines.

#### Finish

Units have a stainless steel top frame, stainless steel inner pan and chiller plated, and stainless steel outer wrap.

#### Insulation

Nominal two (2) inch thick foamed-in-place polyurethane.

#### Cut-out Sizes

Upon installation, cut out dimensions should be 1/2" smaller than length and width of model (see dimensional data for details).

#### Warranty

One (1) Year Parts & Labor

#### Control Box

Includes thermostat, defrost time clock, solenoid valve and thermal expansion valve.

### Models

KRD-27R	27" Length	3 Pan
KRD-34R	34" Length	4 Pan
KRD-41R	41" Length	5 Pan
KRD-48R	48" Length	6 Pan
KRD-55R	55" Length	7 Pan
KRD-62R	62" Length	8 Pan
KRD-69R	69" Length	9 Pan
KRD-76R	76" Length	10 Pan
KRD-83R	83" Length	11 Pan
KRD-90R	90" Length	12 Pan

### Features & Benefits




- » Patented Technology – Designed with refrigeration running through each divider bar to ensure direct contact with condiment pans, always keeping food fresh and preventing waste.  
US Patent – 5,355,687 and 5,927,092
- » Flush Mounted Design – Heavy duty stainless steel flush mounted raised rail with slight slope. Prevents corrosion and deterioration from foods (acid based foods) spilling into pan chiller compartment and also makes pans easier to reach.
- » Maximum Versatility – Can be designed to accommodate different pan configurations/sizes depending on menu requirements (horizontal divider bars available)

#### Optional Stub-out locations for:

- » Drain
- » Refrigeration
- » Electrical







KRD / 01-08-2013  
Made in the U.S.A.

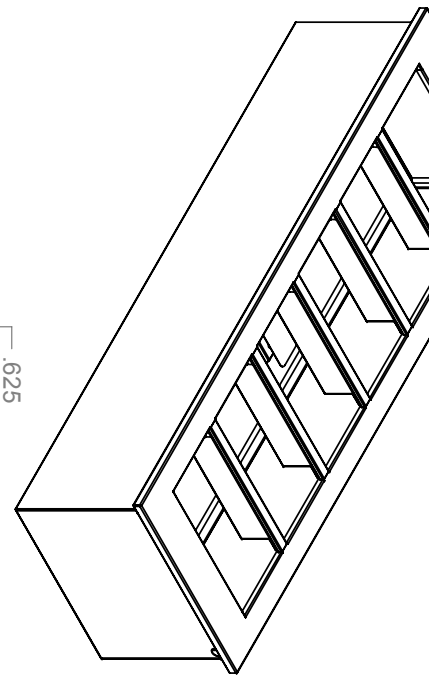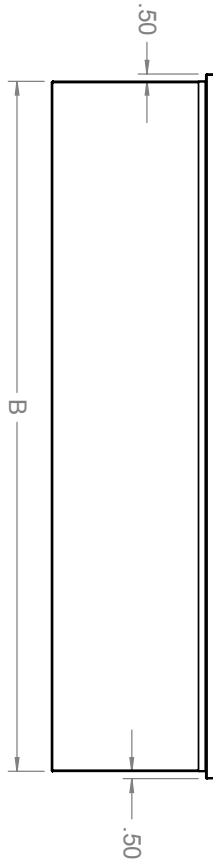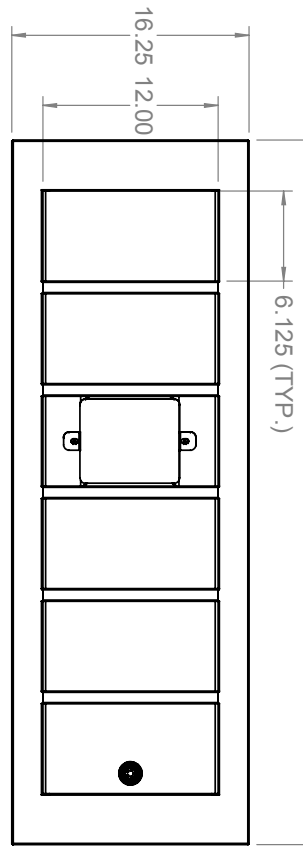

MODEL NUMBER	A	B	1/3 PANS QTY	BTU/HR	CUTOUT +1/8"-.0.0"	REFRIGERANT	VOLTAGE	FULL LOAD (A)
KRD-27R	27.125	26.125	3	750	26.625X15	R-404A	115/60/1	1
KRD-34R	34.125	33.125	4	1000	33.625X15	R-404A	115/60/1	1
KRD-41R	41.125	40.125	5	1250	40.625X15	R-404A	115/60/1	1
KRD-48R	48.125	47.125	6	1500	47.625X15	R-404A	115/60/1	1
KRD-55R	55.125	54.125	7	1750	54.625X15	R-404A	115/60/1	1
KRD-62R	62.125	61.125	8	2000	61.625X15	R-404A	115/60/1	1
KRD-69R	69.125	68.125	9	2250	68.625X15	R-404A	115/60/1	1
KRD-76R	76.125	75.125	10	2500	75.625X15	R-404A	115/60/1	1
KRD-83R	83.125	82.125	11	2750	82.625X15	R-404A	115/60/1	1
KRD-90R	90.125	89.125	12	3000	89.625X15	R-404A	115/60/1	1

**STANDARD FEATURES**

- LIFT OFF NIGHT COVER.
- STAINLESS STEEL EXTERIOR.
- CONTROL ASSEMBLY SHIPPED LOOSE.

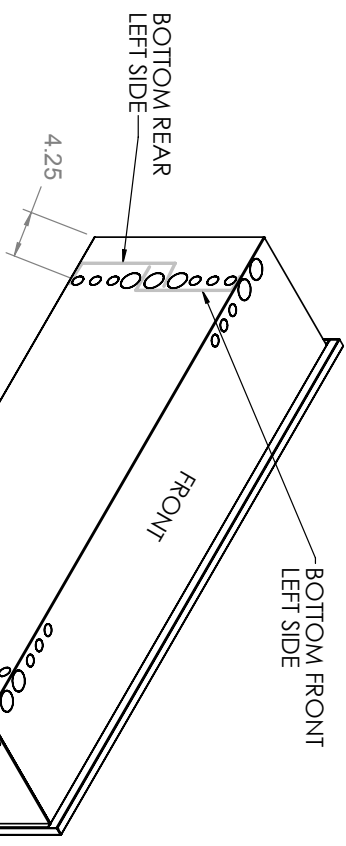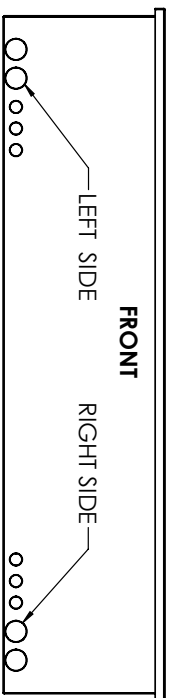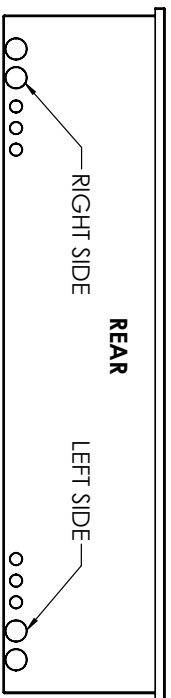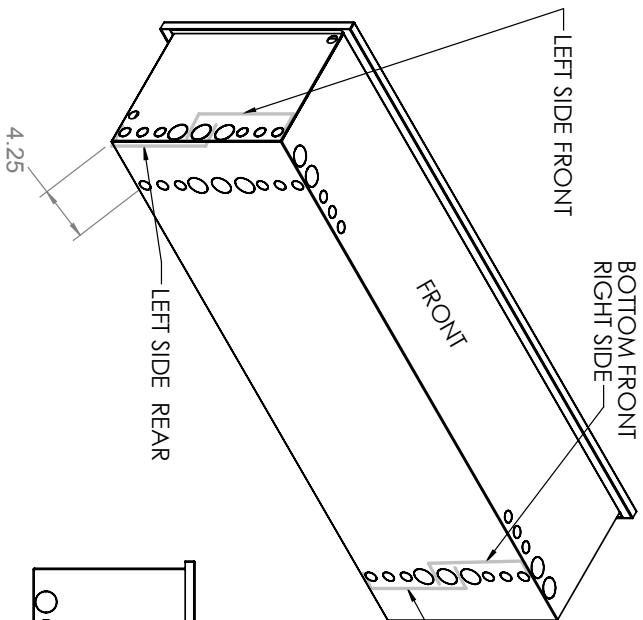

**OPTIONAL STUB OUT LOCATIONS**

